




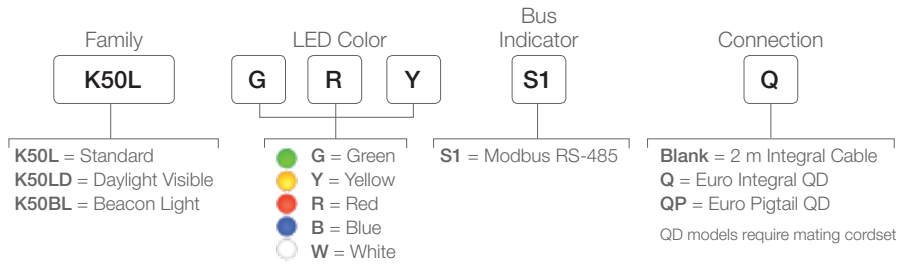



## K50 Modbus Indicators

---

- Rugged, compact multi-color indicators in several package types
- Built-in flashing and strobing capability
- High intensity models for outdoor applications
- Fully encapsulated IP67/IP69K construction
- Modbus RTU communication minimizes the cabling requirements



|                       |   |
|-----------------------|---|
| Supply Voltage        | 12 to 30 V dc   |
| Construction          | Base: Polycarbonate<br>Covers: Polycarbonate<br>LEDs on LD Models: Acrylic  |
| Environmental Rating  | IEC IP67/IP69K per DIN 40050  |
| Operating Temperature | -40 to +50 °C (-40 to +122 °F)  |
| Certifications        |   |

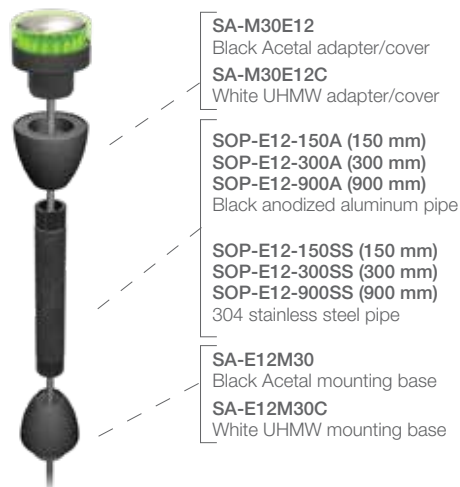

see page 61 for additional information on this folding bracket

Additional accessories are available at [bannerengineering.com](http://bannerengineering.com)