




## K80 Segmented Indicators

---

- Individual color quadrants can be lighted separately or in combination
- For error-proofing and "Andon" applications
- Provides operator guidance, even for those with limited color recognition ability
- Optional labels for enhanced segment identification
- Mounts easily on flat surface or pipe for elevated use
- PNP (sourcing) or NPN (sinking) input type, depending on model
- Flash functionality available on one-color models

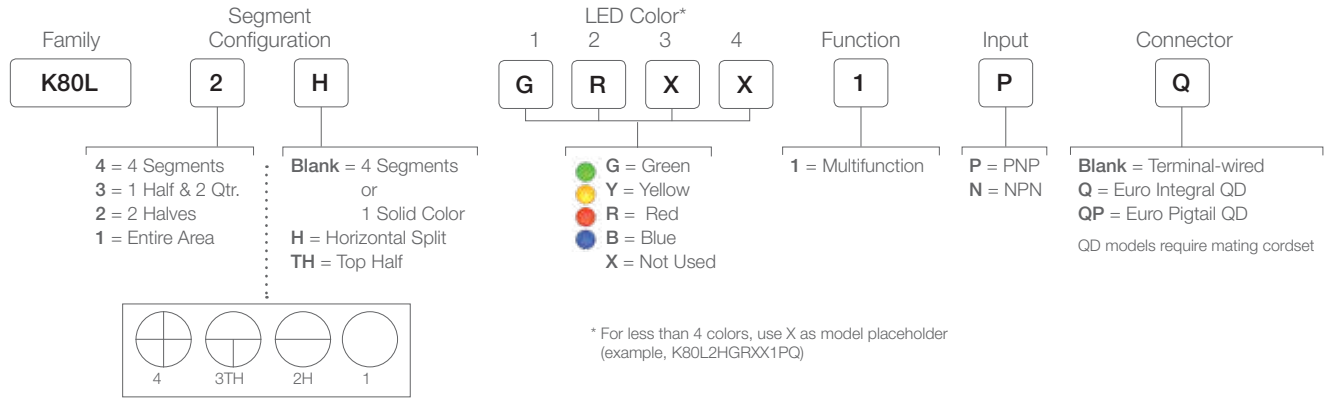


Supply Voltage | 18 to 30 V dc

Construction | Base: ABS/Polycarbonate  
Translucent Face: Acrylic

Environmental Rating | IEC IP67

Operating Temperature | -40 to +50 °C (-40 to +122 °F)

Certifications | **CE**

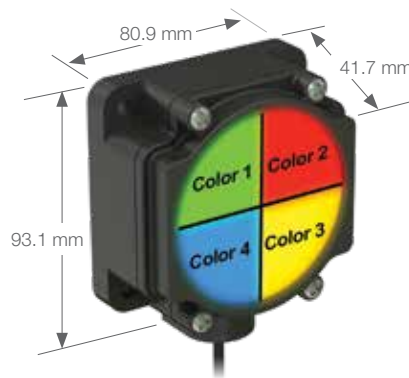

2-Segment



3-Segment



4-Segment



**SMBDX80DIN**  
for mounting to 35 mm DIN Rail

**Segmented Indicator Label Kits**



**SALK-K80L4**  
4-segment transparent laser label (includes 30 labels and 1 protective cover labels)



**SALK-K804-0**  
1-segment transparent laser label (includes 30 labels)



**5-Pin M12/  
Euro-Style**  
Straight connector models listed;  
for right-angle models, add RA  
to the end of model number  
(example, MQDC1-506RA)

**MQDC1-506**  
2 m (6.5')  
**MQDC1-515**  
5 m (15')  
**MQDC1-530**  
9 m (30')

Additional accessories are available at  
[bannerengineering.com](http://bannerengineering.com)