




S18L & S22L Barrel Indicators


- Gasketed face flange for sealing to enclosures
- IP69K rated to withstand harsh wash-down environments
- Daylight visible models are also available for areas with high levels of ambient light
- M12 Euro connector models available for plug-and-play indication
- 10 to 30 V dc operating range allows for use in battery-powered mobile applications
- Terminal-wired models available to simplify panel wiring
- Up to three independent colors in one unit
- Translucent face appears gray when off to avoid false indication
- Multiple colors available, including green, red, yellow, blue, white, orange
- Available with PNP or NPN input, depending on model

Standard

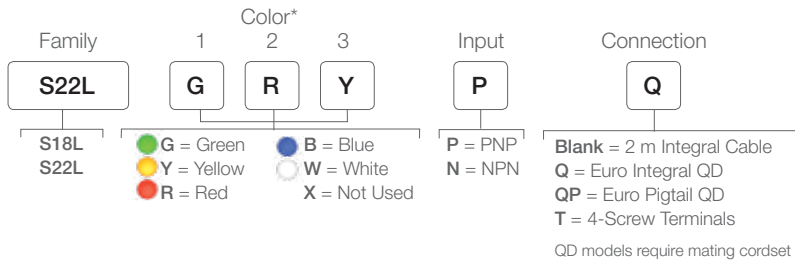


Laser Marking Available

Daylight Visible

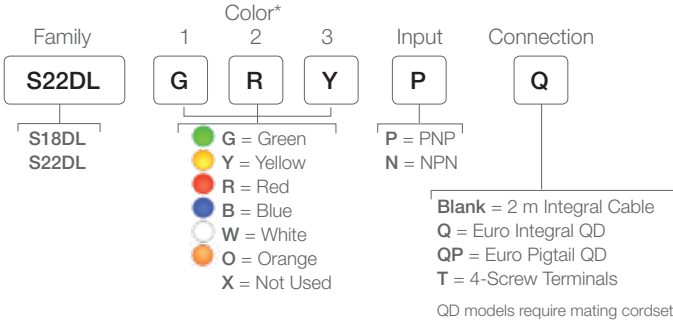

Daylight Visible High-Intensity

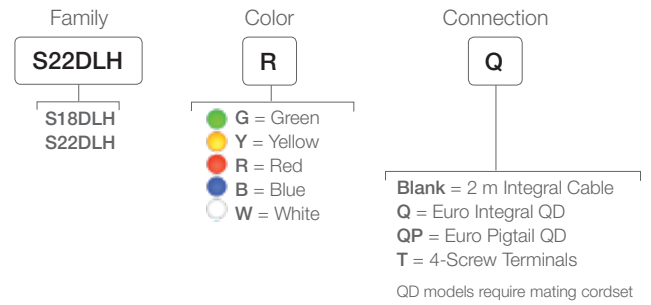

* Single-color models are available and should be ordered as PNP, but can be wired for either PNP or NPN input

Supply Voltage

General Purpose: 10 to 30 V dc
 High-Intensity Models: 9 to 30 V dc

Construction

Housing: UV stabilized polycarbonate
 Mounting Nut: PBT
 Sealing Washer: Nitrile


Environmental Rating

IEC IP67, IP69K, per DIN 40050

Operating Temperature

General Purpose: -40 to +50 °C (-40 to +122 °F)
 Other Models: -40 to +60 °C (-40 to +140 °F)

Certifications

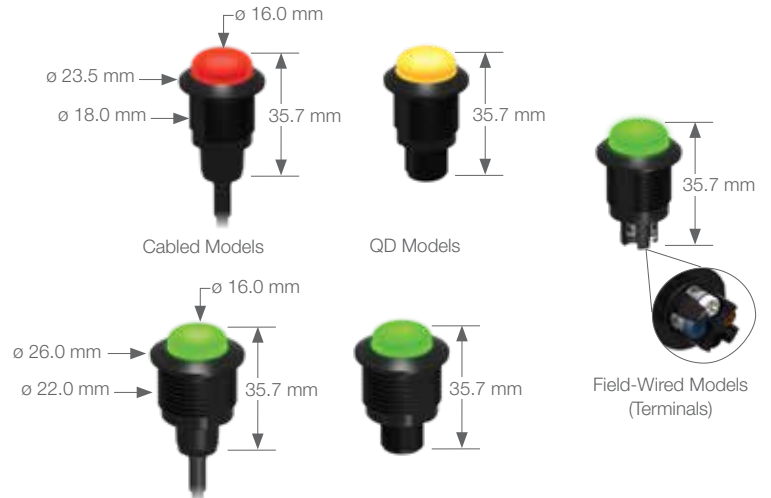

4-Pin M12/Euro-Style
 Straight connector models listed; for right-angle models, add RA to the end of model number (example, MQDC-406RA)

MQDC-406
2 m (6.5')
MQDC-415
5 m (15')
MQDC-430
9 m (30')

Additional accessories are available at bannerengineering.com



S22L2 Flush Mount Indicator

- Bright, even indication in red, green, blue, yellow, cyan, magenta, and white
- Models constructed from FDA-grade materials available for use in food and beverage applications
- Terminal connector options for fast, economical installation in panels
- Flush design matches S22 Touch buttons, see page 102



Supply Voltage

10 to 30 V dc

Construction

Housing: Polycarbonate or FDA grade plastic, depending on model
 Translucent dome: Polycarbonate or FDA grade plastic, depending on model
 Mounting Nut: PBT or FDA food grade plastic

Environmental Rating

Standard: UL Type 4x, 13
 FDA Grade: UL Type 4x (indoor)
 Cable, Pigtail, QD models: IEC IP66, IP67, IP69K per DIN 40050-9
 Terminal models: IEC IP66, IP69K per DIN 40050-9 on front only

Operating Conditions

Temperature: -40 to +50 °C
 Storage Temperature: -40 to +70 °C

Certifications



5-Pin Euro-Style

Straight connector models listed; for right-angle models, add RA to the end of model number (example, MQDC1-506RA)

- MQDC1-506**
2 m (6.5')
- MQDC1-515**
5 m (15')
- MQDC1-530**
9 m (30')

5-pin M12 Euro-Style Washdown Cordset
 Straight connector models only

- MQDC-WDSS-0506**
2 m (6.5')
- MQDC-WDSS-0515**
5 m (15')
- MQDC-WDSS-0530**
9 m (30')

Additional accessories are available at bannerengineering.com