MRC Serie

C2-A2x

8-pin standard relay, 2-pole, plug-in according to IEC 60067

Type	**C2-A2x/ ... V** Standard relay, 2 change-over contacts
Maximum contact load	**10 A/250 V AC-1 0,5 A/110 V DC-1** **10 A/30 V DC-1 0,2 A/220 V DC-1**
Recommended minimum contact load	**10 mA/10 V Code 0, 9** **5 mA/5 V Code 8**

Contacts

Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi + 10 µ Au
	Optional	Code 9	AgNi + 0,2 µ Au
Max. switching current			10 A
Max. peak inrush current (20 ms.)			30 A
Max. switching voltage			250 V
Max. AC load (Fig 1 1)			2,5 kVA
Max. DC load			See Fig 2

Coils

Coil resistance	see table; tolerance ± 10 %
Pull-in voltage	≤ 0,8 x U_N
Pull-in voltage	≥ 0,1 x U_N
Nominal power	2,2 VA (AC)/1,3 W (DC)

Table

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	443	54
48	296	46	48	1K8	27
115	1K7	19	110	9K	12
230	7K1	9,5	220	36K1	6

Insulation

Insulation	Volt rms, 1 min
Open contact	1000 V
Between adjacent poles	2,5 kV
Between contacts and coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time + bounce time	16 ms/≤ 3 ms
Release time + bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 ops. switching cycles
Operating frequency at nominal load	≤1200/ops/h
Protection degree	IP40
Weight	79 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C2-A20/AC ... V**	**C2-A28/AC ... V**	**C2-A29AC ... V**
LED	**C2-A20X/AC ... V**	**C2-A28X/AC ... V**	**C2-A29X/AC ... V**
VDC 24, 48, 110, 220	**C2-A20/DC ... V**	**C2-A28/DC ... V**	**C2-A29/DC ... V**
LED	**C2-A20X/DC ... V**	**C2-A28X/DC ... V**	**C2-A29X/DC ... V**
Free wheeling diode	**C2-A20DX/DC ... V**	**C2-A28DX/DC ... V**	**C2-A29DX/DC ...V**
Polarity and free wheeling diode	**C2-A20FX/DC ... V**	**C2-A28FX/DC ... V**	**C2-A29FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C2-A20BX/UC ... V**	**C2-A28BX/UC ... V**	**C2-A29BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S2-B, S2-S, S2-L, S2-P, S2-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram



Fig. 1 AC voltage endurance

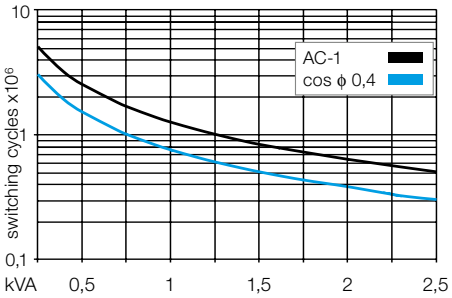

Fig. 2 DC load limit curve

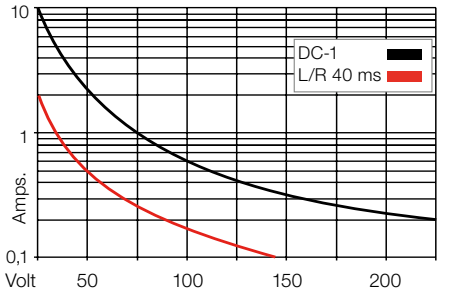

Dimensions [mm]

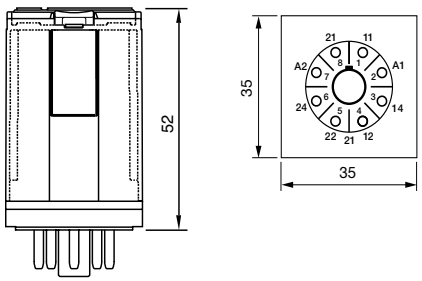

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C2-T2x

8-pin standard relay, 2-pole, twin contact, plug-in according to IEC 60067

Type			**C2-T2x/ ... V** Standard relay for low level 2 Change-over contacts		
Maximum contact load			**6 A/250 V**	**AC-1**	**6 A/30 V** **DC-1**
Recommended minimum contact load			**5 mA/5 V** **1 mA/5 V**	**Code 1** **Code 2**	
Contacts					
Material	Standard	Code 1	AgNi + 0,2 µ Au		
	Optional	Code 2	AgNi + 10 µ Au		
Rated current			6 A		
Switch-on current max. (20 ms)			15 A		
Switching voltage max.			250 V		
AC load (Fig 1)			1,2 kVA		
DC load			see Fig. 2		
Coil					
Coil resistance			see table; tolerance ± 10 %		
Pick-up voltage			≤ 0,8 x U_N		
Release voltage			≥ 0,1 x U_N		
Nominal power			2,2 VA (AC)/1,3 W (DC)		

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	443	54
48	296	46	48	1K8	27
115	1K7	19	110	9K	12
230	7K1	9,5	220	36K1	6

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3
Specifications	
Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	16 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	79 g

Standard types		
VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C2-T21/AC ... V**	**C2-T22/AC ... V**
LED	**C2-T21X/AC ... V**	**C2-T22X/AC ... V**
VDC 24, 48, 110, 220	**C2-T21/DC ... V**	**C2-T22/DC ... V**
LED	**C2-T21X/DC ... V**	**C2-T22X/DC ... V**
Free wheeling diode	**C2-T21DX/DC ... V**	**C2-T22DX/DC ... V**
Polarity and free wheeling diode	**C2-T21FX/DC ... V**	**C2-T22FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C2-T21BX/UC ... V**	**C2-T22BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories	
Socket:	**S2-B, S2-S, S2-L, S2-P, S2-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram



Fig. 1 AC voltage endurance

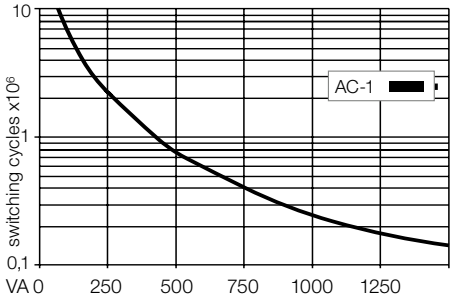

Fig. 2 DC load limit curve

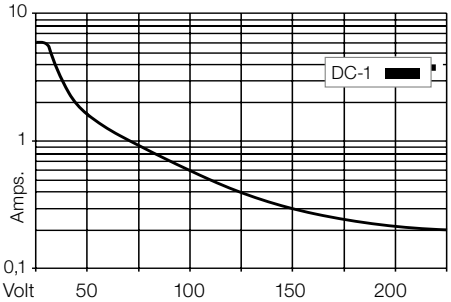

Dimensions [mm]

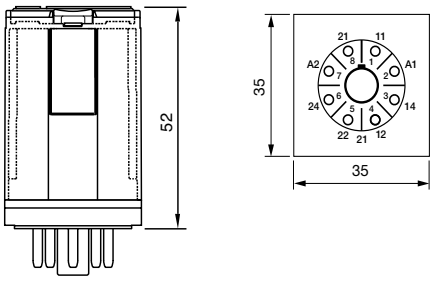

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

MRC series

C2-G2x

8-pin standard relay, 2-pole, plug-in according to IEC 60067

Type	**C2-G2x/ ... V** Standard relays, DC application 2 open contacts
Maximum contact load	**10 A/250 V AC-1 1,2 A/110 V DC-1** **10 A/30 V DC-1 0,4 A/220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,6 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	360	66
48	286	50	48	1K4	34
115	1K7	21	110	7K6	15
230	6K8	10	220	30K3	7,5

Insulation

	Volt rms, 1 min
Contact open	2000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, EN 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	79 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C2-G20/AC ... V**
LED	**C2-G20X/AC ... V**
VDC 24, 48, 110, 220	**C2-G20/DC ... V**
LED	**C2-G20X/DC ... V**
Free wheeling diode	**C2-G20DX/DC ... V**
Polarity and free wheeling diode	**C2-G20FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C2-G20BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S2-B, S2-S, S2-L, S2-P, S2-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram

Gap: 1,7 mm



Fig. 1 AC voltage endurance

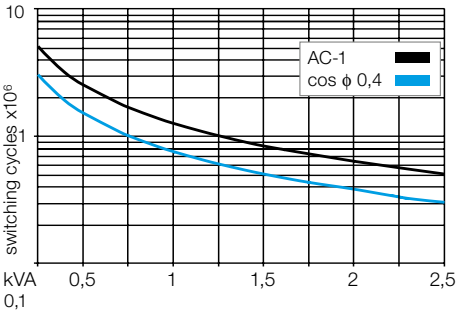

Fig. 2 DC load limit curve

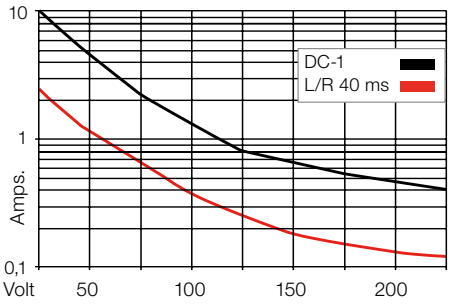

Dimensions [mm]

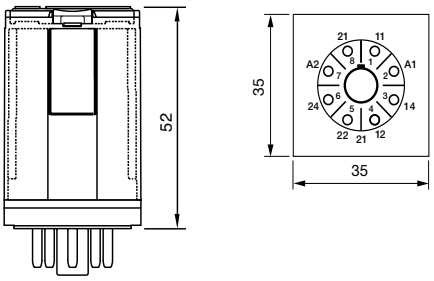

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C3-A3x

11-pin standard relays, 3-pole, plug-in, according to IEC 60067

Type	**C3-A3x/ ... V** Standard relays, 3 change-over contacts
Maximum contact load	**10 A/250 AC-1 0,5 A/110 V DC-1** **10 A/30 DC-1 0,2 A/220 V DC-1**
Recommended minimum contact load	**10 mA/10 V Code 0, 9** **5 mA/5 V Code 8**

Contacts

Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi + 10 µ Au
	Optional	Code 9	AgNi + 0,2 µ Au
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,2 VA (AC)/1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	480	50
48	296	46	48	1K8	26
115	1K7	19	110	9K	12
230	7K1	9,5	220	36K1	6

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	16 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥ 100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	81 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C3-A30/AC ... V**	**C3-A38/AC ... V**	**C3-A39/AC ... V**
LED	**C3-A30X/AC ... V**	**C3-A38X/AC ... V**	**C3-A39X/AC ... V**
VDC 24, 48, 110, 220	**C3-A30/DC ... V**	**C3-A38/DC ... V**	**C3-A39/DC ... V**
LED	**C3-A30X/DC ... V**	**C3-A38X/DC ... V**	**C3-A39X/DC ... V**
Free wheeling diode	**C3-A30DX/DC ... V**	**C3-A38DX/DC ... V**	**C3-A39DX/DC ... V**
Polarity and free wheeling diode	**C3-A30FX/DC ... V**	**C3-A38FX/DC ... V**	**C3-A39FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C3-A30BX/UC ... V**	**C3-A38BX/UC ... V**	**C3-A39BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S3-B, S3-S, S3-L, S3-P, S3-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram



Fig. 1 AC voltage endurance

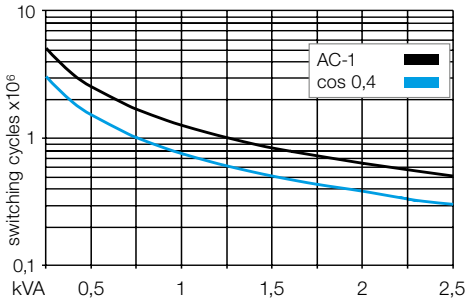

Fig. 2 DC load limit curve

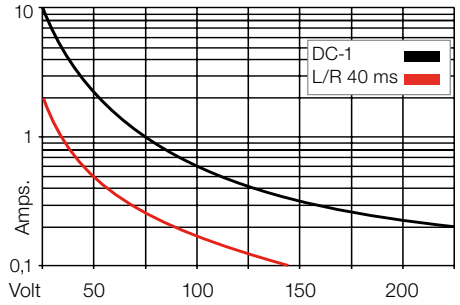

Dimensions [mm]

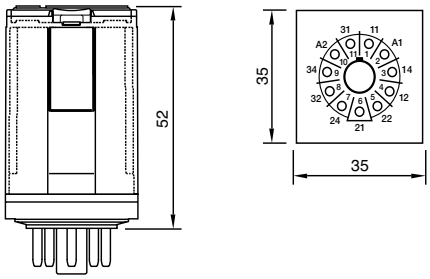

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

C3-T3x

11-pin standard relay, 3-pole, twin contact, plug-in according to IEC 60067

Type			**C3-T3x/ ... V** Standard relays for low level 3 change-over twin contacts		
Maximum contact load			**6 A/250 V**	**AC-1**	**6 A/30 V** **DC-1**
Recommended minimum contact load			**5 mA/5 V** **1 mA/5 V**	**Code 1** **Code 2**	
Contacts					
Material	Standard	Code 1	AgNi + 0,2 µ Au		
	Optional	Code 2	AgNi + 10 µ Au		
Rated current			6 A		
Switch-on current max. (20 ms)			15 A		
Switching voltage max.			250 V		
AC load (Fig 1)			1,2 kVA		
DC load			see Fig. 2		

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,2 VA (AC)/1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	480	50
48	296	46	48	1K8	26
115	1K7	19	110	9K	12
230	7K1	9,5	220	36K1	6

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, EN 61810-1	2,5 kV/3

Specifications	
Ambient temperature operation/storage	-40 … 70 °C /-40 … 80 °C
Pick-up time/bounce time	8 ms/≤ 3 ms
Release time/bounce time	18 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	81 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C3-T31/AC ... V**	**C3-T32/AC ... V**
LED	**C3-T31X/AC ... V**	**C3-T32X/AC ... V**
VDC 24, 48, 110, 220	**C3-T31/DC ... V**	**C3-T32/DC ... V**
LED	**C3-T31X/DC ... V**	**C3-T32X/DC ... V**
Free wheeling diode	**C3-T31DX/DC ... V**	**C3-T32DX/DC ... V**
Polarity and free wheeling diode	**C3-T31FX/DC ... V**	**C3-T32FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C3-T31BX/UC ... V**	**C3-T32BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S3-B, S3-S, S3-L, S3-P, S3-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram



Fig. 1 AC voltage endurance

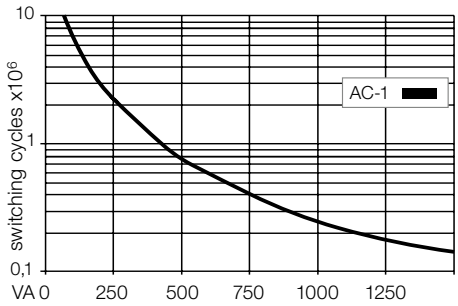

Fig. 2 DC load limit curve

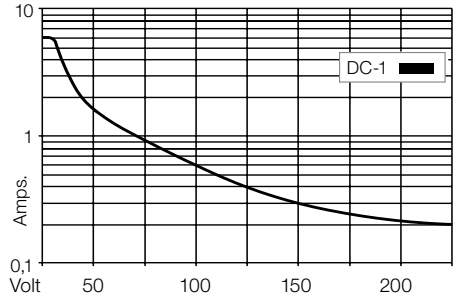

Dimensions [mm]

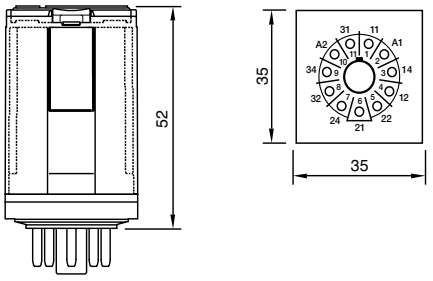

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C3-G3x

11-pin standard relay, 3-pole, open contact, according to IEC 60067

Type	**C3-G3x/ ... V** Standard relays, DC application 3 open contacts
Maximum contact load	**10 A 250 V AC-1 1,2 A/110 V DC-1** **10 A 30 V DC-1 0,4 A/220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,6 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	360	66
48	286	50	48	1K4	34
115	1K7	21	110	7K6	15
230	6K8	10	220	30K3	7,5

Insulation

	Volt rms, 1 min
Contact open	2000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/ h
Protection class	IP40
Weight	81 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C3-G30/AC ... V**
LED	**C3-G30X/AC ... V**
VDC 24, 48, 110, 220	**C3-G30/DC ... V**
LED	**C3-G30X/DC ... V**
Free wheeling diode	**C3-G30DX/DC... V**
Polarity and free wheeling diode	**C3-G30FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C3-G30BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S3-B, S3-S, S3-L, S3-P, S3-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram



Fig. 1 AC voltage endurance

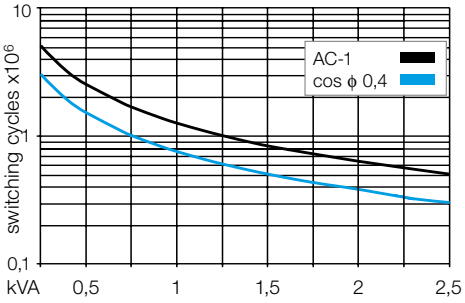

Fig. 2 DC load limit curve

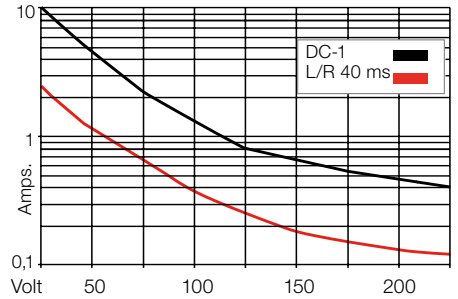

Dimensions [mm]

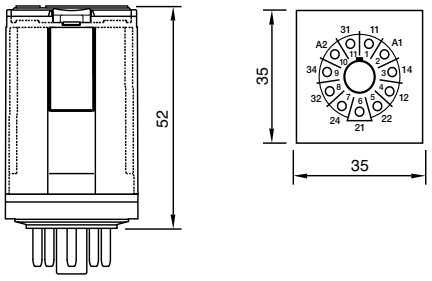

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

MRC series

C3-M1x

11-pin power relay, 1-pole, magnetic blow out, according to IEC 60067

Type	**C3-M1x/ ... V** Power relays, DC, application 1 pole, magnetic blow out
Maximum contact load	**10 A 250 V AC-1 10 A 220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC) / 1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	480	50
48	286	50	48	1K8	26
115	1K7	21	110	9K	12
230	6K8	10	220	29K	7,5

Insulation

	Volt rms, 1 min
Contact open	2500 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1:	2,5 KV / 3

Specifications

Ambient temperature operation/storage	-40 … 70 °C (55° C AC) /-40 ... 80 °C
Nominal coil power	2,4 VA (AC), 1,3 W (DC)
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Isolation: EN 60947, pollution rate 3, Gr C	250 V
Dielectric strength, Contact/Coil	2,5 KV

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C3-M10/AC ... V**
LED	**C3-M10X/AC ... V**
VDC 24, 48, 110, 220	**C3-M10/DC ... V**
LED	**C3-M10X/DC ... V**
Free wheeling diode	**C3-M10DX/DC ... V**
Polarity and free wheeling diode	**C3-M10FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C3-M10BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S3-B, S3-S, S3-L, S3-P, S3-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram

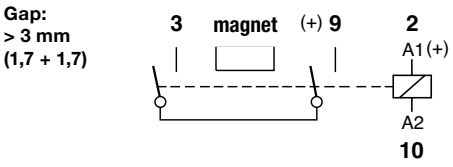

Fig. 1 AC voltage endurance

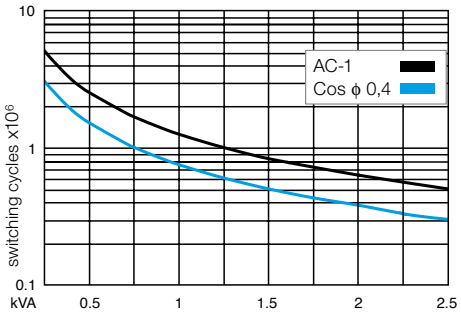

Fig. 2 DC voltage endurance

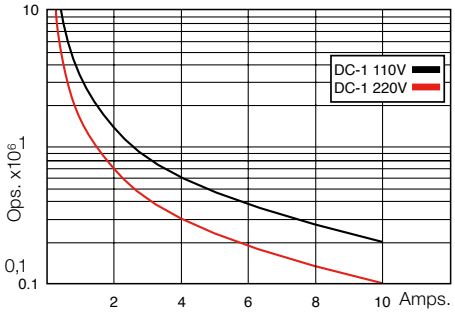

Dimensions [mm]

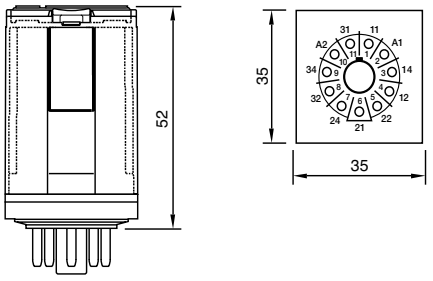

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C3-X1x

11-pin power relay, 1-pole, double make, according to IEC 60067

Type	**C3-X1x/ ... V** Power relays for DC application 1 pole, NO, double make
Maximum contact load	**10 A/250 V AC-1 7 A/110 V DC-1** **10 A/30 V DC-1 1,2 A/220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	480	54
48	286	50	48	1K8	26
115	1K7	21	110	9K	12
230	6K8	10	220	29K	7,5

Insulation

	Volt rms, 1 min
Contact open	2500 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	18 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	83 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C3-X10/AC ... V**
LED	**C3-X10X/AC ... V**
VDC 24, 48, 110, 220	**C3-X10/DC ... V**
LED	**C3-X10X/DC ... V**
Free wheeling diode	**C3-X10DX/DC ... V**
Polarity and free wheeling diode	**C3-X10FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C3-X10BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S3-B, S3-S, S3-L, S3-P, S3-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram

Gap:
> 3 mm
(1,7 + 1,7)



Fig. 1 AC voltage endurance

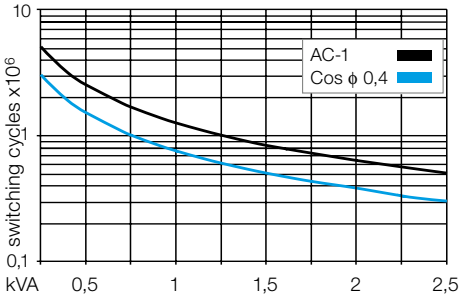

Fig. 2 DC load limit curve

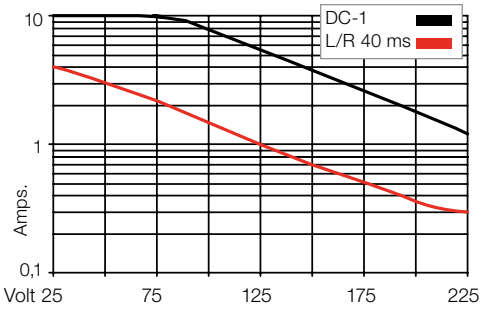

Dimensions [mm]

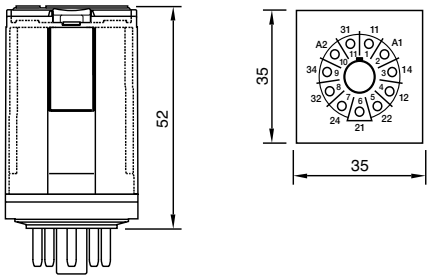

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

MRC series

C3-R2x

11-pin remanence relays, 2-pole, according to IEC 60067

Type	**C3-R2x/ ... V** Remanence plug-in relays, 2 change-over contacts
Maximum contact load	**10 A/250 V AC-1 0,5 A/110 V DC-1** **10 A/30 V DC-1 0,2 A/220 V DC-1**
Recommended minimum contact load	**10 mA/10 V Code 0, 9** **5 mA/5 V Code 8**

Contacts

Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi + 10 µ Au
	Optional	Code 9	AgNi + 0,2 µ Au
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
ON pulse power	1,5 VA/W
OFF pulse power	0,5 VA/W
Pull-in ON/OFF	≤ 0,8 x U_N

Internal Diagram:



Coil table

VAC	mA ON	mA OFF	VDC	mA ON	mA OFF
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2,5	48	31	10
230	8	1,3	110	14	4,5

Insulation

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Minimum pulse length for ON/OFF	50 ms
Mechanical life ops	10 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	81 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115, 230	**C3-R20/AC ... V**	**C3-R28/AC ... V**	**C3-R29/AC ... V**
VDC 12, 24, 48, 110	**C3-R20/DC ... V**	**C3-R28/DC ... V**	**C3-R29/DC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S3-B, S3-S, S3-L, S3-P, S3-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**
Retaining clip, plastic:	**S30-CM**

Connection diagram



Fig. 1 AC voltage endurance

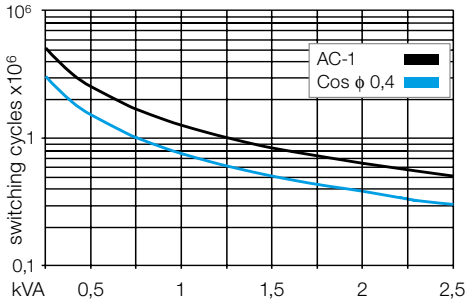

Fig. 2 DC load limit curve

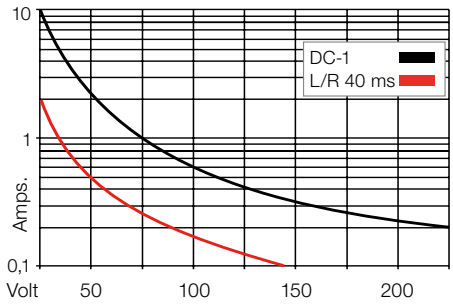

Dimensions [mm]

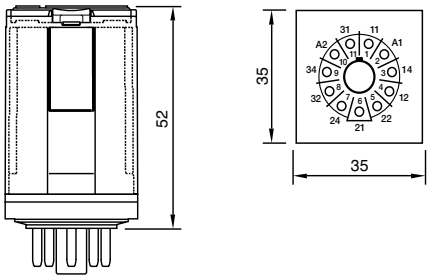

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C4-A4x

14-pin, standard relay, 4-pole, plug-in, faston

Type			**C4-A4x/ ... V** Standard relays, 4 change-over contacts
Maximum contact load			**10 A/250 V AC-1 0,5 A/110 V DC-1** **10 A/30 V DC-1 0,2 A/220 V DC-1**
Recommended minimum contact load			**10 mA/10 V Code 0, 9** **5 mA/5 V Code 8**
Contacts			
Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi + 10 µ Au
	Optional	Code 9	AgNi + 0,2 µ Au
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,4 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	414	58
48	286	50	48	1K6	30
115	1K7	21	110	8K1	13
230	6K8	10	220	35K7	6,2

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3
Specifications	
Ambient temperature operation/storage	-40 (no ice)....60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	90 g

Standard types		
VAC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	**C4-A40/AC ... V**	**C4-A48/AC ... V**
LED	**C4-A40X/AC ... V**	**C4-A48X/AC ... V**
RC suppresor	**C4-A40R/AC ... V**	**C4-A48R/AC ... V**
VDC 24, 48, 110, 220	**C4-A40/DC ... V**	**C4-A48/DC ... V**
LED	**C4-A40X/DC ... V**	**C4-A48X/DC ... V**
Free wheeling diode	**C4-A40DX/DC ... V**	**C4-A48DX/DC ... V**
Polarity and free wheeling diode	**C4-A40FX/DC ... V**	**C4-A48FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C4-A40BX/UC ... V**	**C4-A48BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories	
Socket:	**S4-J, S4-L, S4-P, S4-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram



Fig. 1 AC voltage endurance

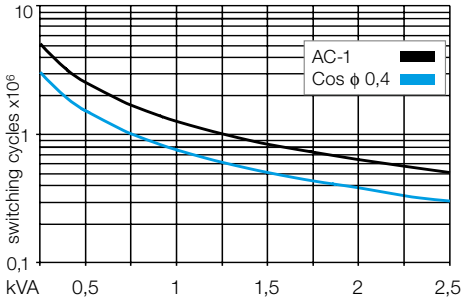

Fig. 2 DC load limit curve

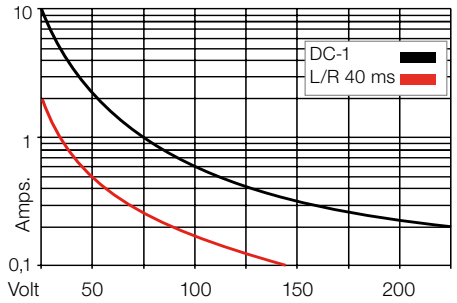

Dimensions [mm]

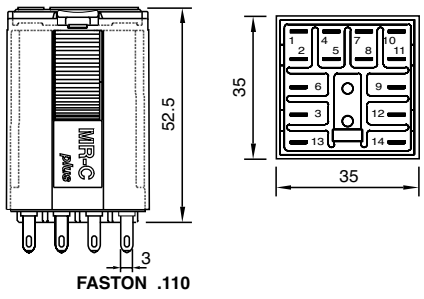

Technical approvals, conformities

Lloyd's

IEC 61810; EN 60947

MRC series

C4-X2x

14-pin, power relay, double-make, faston

Type	**C4-X2x/ ... V** Power relays, DC application 2-pole, NO, double make
Maximum contact load	**10 A/250 V AC-1 7 A/110 V DC-1** **10 A/30 V DC-1 1,2 A/220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	443	54
48	286	50	48	1K8	27
115	1K7	21	110	9K2	12
230	6k8	10	220	36K1	6

Insulation

	Volt rms, 1 min
Contact open	2500 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	90 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	**C4-X20/AC ... V**
LED	**C4-X20X/AC ... V**
RC Suppresor	**C4-X20R/AC ... V**
VDC 24, 48, 110, 220	**C4-X20/DC ... V**
LED	**C4-X20X/DC ... V**
Free wheeling diode	**C4-X20DX/DC ... V**
Polarity and free wheeling diode	**C4-X20FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C4-X20BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S4-S, S4-L, S4-P, S4-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram

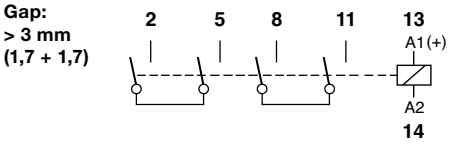

Fig. 1 AC voltage endurance

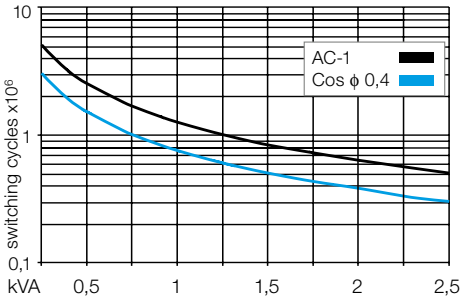

Fig. 2 DC load limit curve

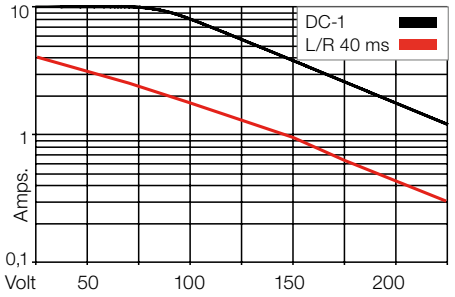

Dimensions [mm]

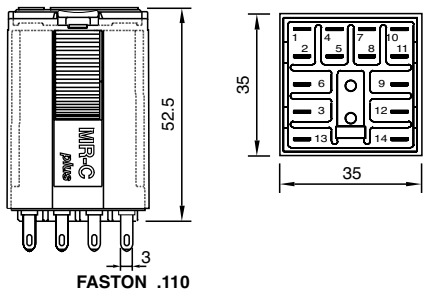

Technical approvals, conformities

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C4-R3x

14-pin, remanence relay, 3-pole, faston

Type	**C4-R3x/ ... V** Magnetic remanence relay 3 change-over contact
Maximum contact load	**10 A/250 V AC-1 0,5 A/110 V DC-1** **10 A/10 V DC-1 0,2 A/220 V DC-1**
Recommended minimum contact load	**10 mA/10 V Code 0, 9** **5 mA/5 V Code 8**

Contacts

Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi + 10 µ Au
	Optional	Code 9	AgNi + 0,2 µ Au
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			250 V
AC load			2,5 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
ON pulse power	1,5 VA/W
OFF pulse power	0,5 VA/W
	1 Winding for AC, 2 Windings for DC
Pull-in ON/OFF	≤ 0,8 x U_N

Internal Diagram:

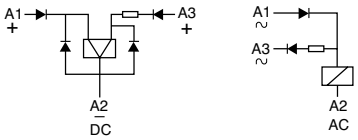

Coil table

VAC	mA ON	mA OFF	VDC	mA ON	mA OFF
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2,5	48	31	10
230	8	1,3	110	14	4,5

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Minimum pulse length for ON/OFF	50 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill. switching cycles
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	95 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115, 230

VDC 12, 24, 48, 110

C4-R30/AC ... V	**C4-R38/AC ... V**	**C4-R39/AC ... V**
C4-R30/DC ... V	**C4-R38/DC ... V**	**C4-R39/DC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S4-J, S4-L, S4-P, S4-P0**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram

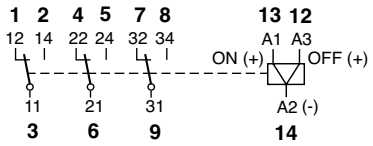

Fig. 1 AC voltage endurance

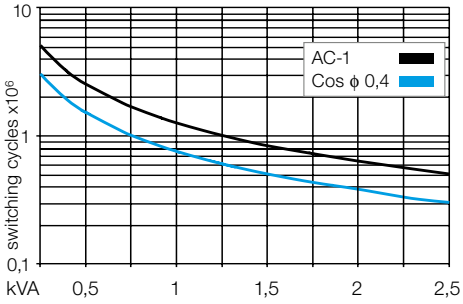

Fig. 2 DC load limit curve

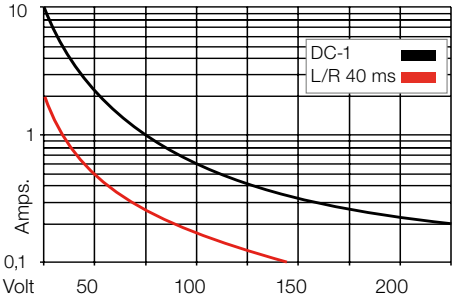

Dimensions [mm]



Technical approvals, conformities

IEC 61810; EN 60947

MRC series

C5-A2x

8-pin, power relay, 2-pole, plug-in, faston

Type	**C5-A2x/ ... V** Power relays, 2 change-over contacts
Maximum contact load	**16 A/400 V AC-1 0,5 A/110 V DC-1** **16 A/30 V DC-1 0,2 A/220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,4 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	414	58
48	286	50	48	1K6	30
115	1K7	21	110	8K1	13
230	6K8	10	220	35K6	6
400	18K8	6			

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥3 GΩ
Insulation, IEC 61810-1	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/ops/h
Protection class	IP40
Weight	90 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C5-A20/AC ... V**
LED	**C5-A20X/AC ... V**
RC suppresor (max 250 V)	**C5-A20R/AC ... V**
VDC 24, 48, 110, 220	**C5-A20/DC ... V**
LED	**C5-A20X/DC ... V**
Free wheeling diode	**C5-A20DX/DC ... V**
Polarity and free wheeling diode	**C5-A20FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C5-A20BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram



Fig. 1 AC voltage endurance

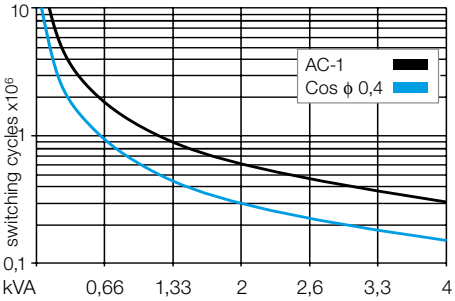

Fig. 2 DC load limit curve

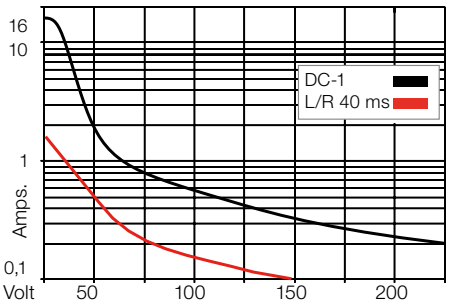

Dimensions [mm]



Technical approvals, conformities

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C5-A3x

11-pin, power relay, 3-pole, plug-in, faston

Type	**C5-A3x/ ... V** Power relays, 3 change-over contacts
Maximum contact load	**16 A/400 V AC-1 0,5 A/110 V DC-1** **16 A/30 V DC-1 0,2 A/220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,4 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	414	58
48	286	50	48	1K6	30
115	1K7	21	110	8K1	13
230	6K8	10	220	35K6	6,2
400	18K8	6			

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥3 GΩ
Insulation, IEC 61810-1	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	95 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	**C5-A30/AC ... V**
LED	**C5-A30X/AC ... V**
RC suppresor (max 250 V)	**C5-A30R/AC ... V**
VDC 24, 48, 110, 220	**C5-A30/DC ... V**
LED	**C5-A30X/DC ... V**
Free wheeling diode	**C5-A30DX/DC ... V**
Polarity and free wheeling diode	**C5-A30FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C5-A30BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram



Fig. 1 AC voltage endurance

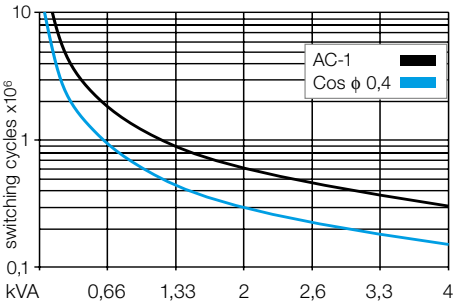

Fig. 2 DC load limit curve

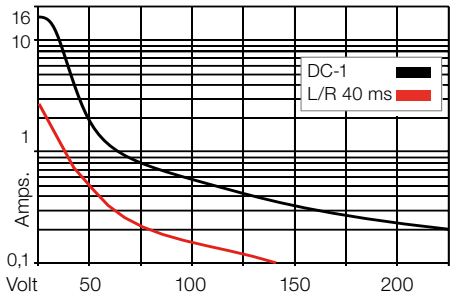

Dimensions [mm]



Technical approvals, conformities

EN 60947; IEC 61810

MRC series

C5-G3x

8-pin, power relay, 3-pole, open contact plug-in, faston

Type			**C5-G3x/ ... V** Power relays, DC application. 3 open contacts
Maximum contact load			**16 A/400 V AC-1 1,2 A/110 V DC-1** **16 A/30 V DC-1 0,4 A/220 V DC-1**
Contacts			
Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2
Coil			
Coil resistance			see table; tolerance ± 10 %
Pick-up voltage			≤ 0,8 x U_N
Release voltage			≥ 0,1 x U_N
Nominal power			2,4 VA (AC)/1,6 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	90	133
48	286	50	24	373	66
115	1K7	21	48	1K4	34
230	6K8	10	110	7K6	15
400	18K8	6	220	30K3	7,5

Insulation	Volt rms, 1 min
Contact open	2000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥ 3 GΩ
Insulation, IEC 61810-1	4 kV/3
Specifications	
Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	95 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	**C5-G30/AC ... V**
LED	**C5-G30X/AC ... V**
RC suppresor (max 250 V)	**C5-G30R/AC ... V**
VDC 12, 24, 48, 110, 220	**C5-G30/DC ... V**
LED	**C5-G30X/DC ... V**
Free wheeling diode	**C5-G30DX/DC ... V**
Polarity and free wheeling diode	**C5-G30FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C5-G30BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories	
Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram

Gap: 1,7 mm



Fig. 1 AC voltage endurance

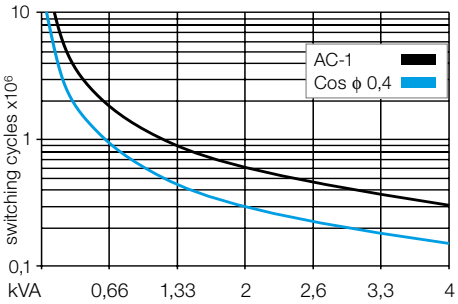

Fig. 2 DC load limit curve

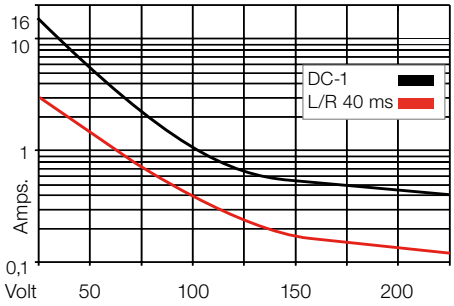

Dimensions [mm]



Technical approvals, conformities

EN 60947; IEC 61810

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C5-X1x

4-pin, power relay, 1-pole, double make, faston

Type	**C5-X1x/ ... V** Power relays, DC application 1 pole, NO, double make
Maximum contact load	**16 A/400 V AC-1 7 A/110 V DC-1** **16 A/30 V DC-1 1,2 A/220V DC-13**

Contacts

Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,3 W (DC))

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	110	108
48	286	50	24	443	54
115	1K7	21	48	1K7	27
230	6K8	10	110	9K2	12
400	18K8	6	220	34K5	6,2

Insulation

	Volt rms, 1 min
Contact open	4 kV
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥ 3 GΩ
Insulation, IEC 61810-1	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 ºC /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	90 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C5-X10/AC ... V**
LED	**C5-X10X/AC ... V**
RC suppresor (max 250 V)	**C5-X10R/AC ... V**
VDC 12, 24, 48, 110, 220	**C5-X10/DC ... V**
LED	**C5-X10X/DC ... V**
Free wheeling diode	**C5-X10DX/DC ... V**
Polarity and free wheeling diode	**C5-X10FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C5-X10BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram



Fig. 1 AC voltage endurance

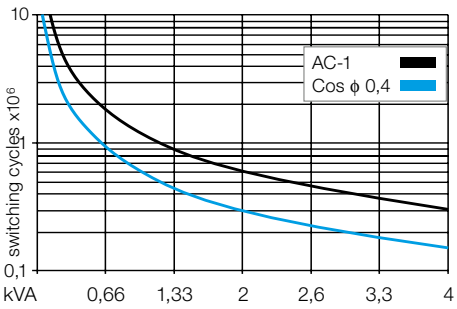

Fig. 2 DC load limit curve

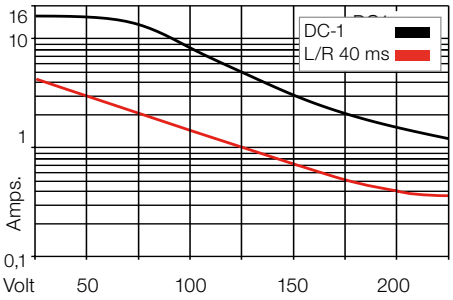

Dimensions [mm]



Technical approvals, conformities

IEC 61810; EN 60947

MRC series

C5-M1x

4-pin, power relay, 1-pole double make, magnetic blow out, faston

Type	**C5-M1x/ ... V** Power relays, DC application 1 pole, NO, magnetic blow out
Maximum contact load	**16 A/400 V AC-1 10 A/220 V DC-1** **3,6 A/110 V DC-13 2 A/220 V DC-13**

Contacts

Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC)/1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	110	108
48	286	50	24	443	54
115	1K7	21	48	1K7	27
230	6K8	10	110	9K2	12
400	18K8	6	220	34K5	6,2

Insulation

	Volt rms, 1 min
Contact open	4000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥3 GΩ
Insulation, IEC 61810-1	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance	see fig. 2
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	90 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C5-M10/AC ... V**
LED	**C5-M10X/AC ... V**
RC suppresor (max 250 V)	**C5-M10R/AC ... V**
VDC 12, 24, 48, 110, 220	**C5-M10/DC ... V**
LED	**C5-M10X/DC ... V**
Free wheeling diode	**C5-M10DX/DC ... V**
Polarity and free wheeling diode	**C5-M10FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C5-M10BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram

Gap:
> 3 mm
(1,7 + 1,7)



Fig. 1 AC voltage endurance

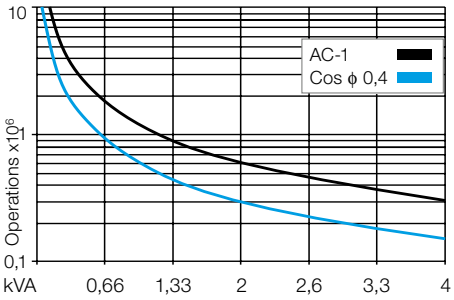

Fig. 2 DC voltage endurance

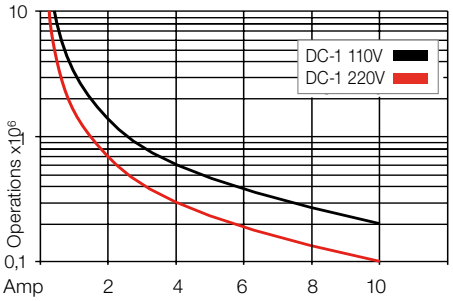

Dimensions [mm]

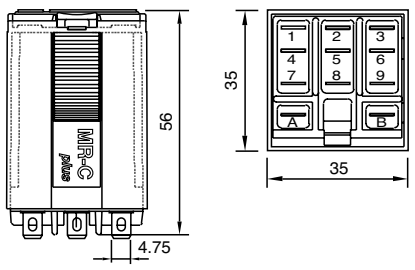

Technical approvals, conformities

IEC 61810; EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C5-M2x

6-pin, power relay, 2-pole normally open, magnetic blow out, faston

Type	**C5-M2x/ ... V** Power relays, DC application double pole, NO, magnetic blow out
Maximum contact load	**16 A / 250 V AC-1** **7 A / 110 V DC-1** **3 A / 220 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			250 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≥ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	2,4 VA (AC) / 1,6 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	90	133
48	286	50	24	373	66
115	1K7	21	48	1K4	33
230	6K8	10.4	110	7K6	15

Insulation

	Volt rms, 1 min
Contact open	2 kV
Contact/contact	4 kV
Contact/coil	3 kV
Insulation resistance at 500 V	≥ 3 GΩ
Insulation, EN 60947/IEC 61810-1:	4 KV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	20 ms/≤ 3 ms
Release time/bounce time	10 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill. switching cycles
DC Rated load	≥ 75.000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	90 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)	**C5-M20/AC ... V**
LED	**C5-M20X/AC ... V**
RC suppresor (max 250 V)	**C5-M20R/AC ... V**
VDC 12, 24, 48, 110, 220	**C5-M20/DC ... V**
LED	**C5-M20X/DC ... V**
Free wheeling diode	**C5-M20DX/DC ... V**
Polarity and free wheeling diode	**C5-M20FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C5-M20BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram



Fig. 1 AC voltage endurance

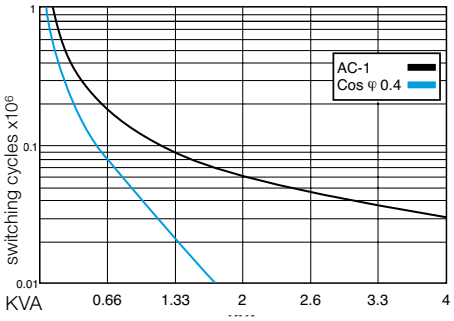

Fig. 2 DC load limit curve

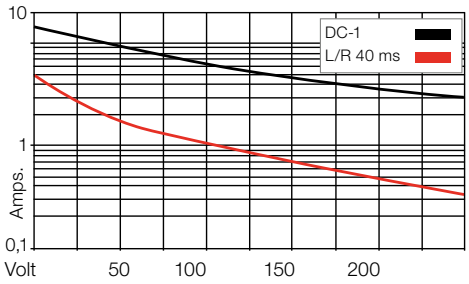

Dimensions [mm]

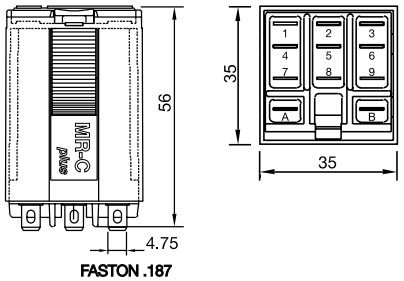

Technical approvals, conformities

IEC 61810; EN 60947

MRC series

C5-R2x

9-pin, remanence relay, 2-pole, faston

Type	**C5-R2x/ ... V** Magnetic latching – Remanence relays 2 change-over contact, 10A
Maximum contact load	**10 A/400 V AC-1 10 A/30 V DC-1** **0,2 A/250 V DC-1 0,5 A/110 V DC-1**

Contacts

Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
ON pulse power	1,5 VA/W
OFF pulse power	0,5 VA/W
1 winding for AC, 2 winding for DC	
Pull-in ON/OFF	< 0,8 x U_N

Internal Diagram:



Coil table

VAC	mA ON	mA OFF	VDC	mA ON	mA OFF
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2,5	48	31	10
230	8	1,3	110	14	4,5

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥3 GΩ
Insulation, EN 60947/IEC 61810-1	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Minimum pulse ON/OFF	50 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	95 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115, 230	**C5-R20/AC ... V**
VDC : 12, 24, 48, 110,	**C5-R20/DC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blanking plug):	**SO-NP, SO-OP**

Connection diagram



Fig. 1 AC voltage endurance

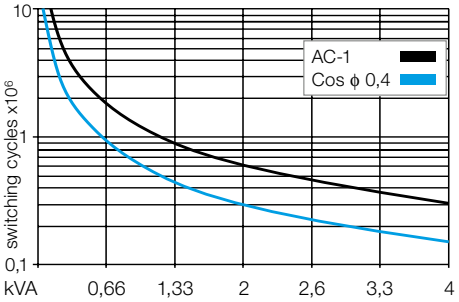

Fig. 2 DC load limit curves

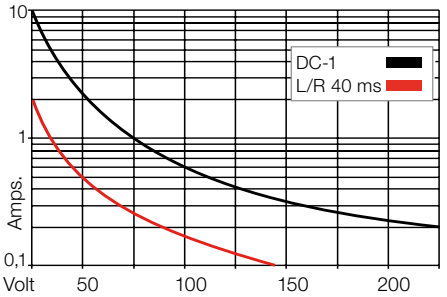

Dimensions [mm]

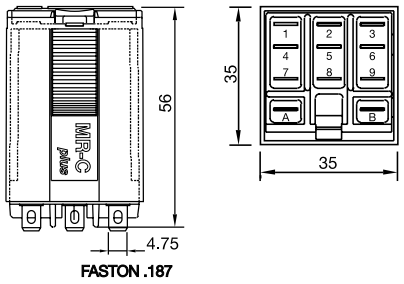

Technical approvals, conformities

IEC 61810, EN 60947

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.